

NEW

MULTITASK

MTL



from 140 to 240 HP



D 28 cm

ROCK GRINDER, STABILIZER, STONE CRUSHER AND ASPHALT SHREDDER FOR PTO TRACTORS.

STANDARD EQUIPMENT

Friction clutch on side PTO

PTO shaft with cam clutch

Gearbox with freewheel

Transmission with side gearbox

Hydraulic rear hood

Adjustable hardox counter-blade

Interchangeable inner antiwear plates in Hardox®

Anti dust machine body

Variable crushing chamber

Bolted grid on rear hood

Inside lateral protection

Protection chains


OPTIONS

Hydraulic top link

Water spray system

Multiple tooth options

Bolt-on chains protection plates

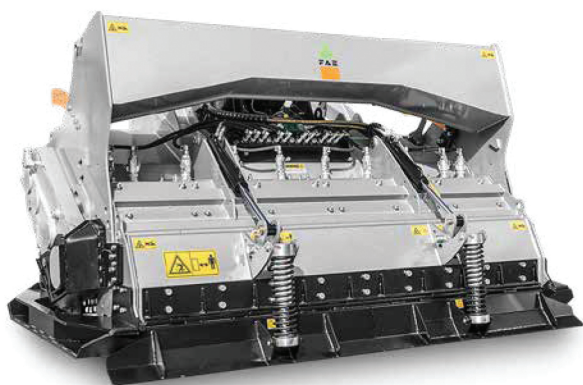

MODEL	Power (HP)	PDF (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	ROTOR G/3		N°. teeth type G/3 + STC/3/FP	ROTOR R (Optional)		N°. teeth type R + R/HD
						Max. 1	Max. 2		Max. 1	Max. 2	
						MTL 150	140-240		1000	1480	
MTL 175	150-240	1000	1720	2060	3620	150	280	54+6	150	280	122+16
MTL 200	160-240	1000	1960	2300	3870	150	280	62+6	150	280	138+16
MTL 225	170-240	1000	2200	2540	4120	150	280	72+6	150	280	154+16

Max. 1: with rotor only

Max. 2: maximum depth (maximum working depth depending on ground conditions)

This information refers to the machine equipped as standard. The technical data in this catalogue may be altered without prior notice.



G/3 (standard)



R 65 (option)



R/HD 65 (option)



R 44 (option)



G/3/R 44 (option)



STC/3/FP (side scraper)



R/HD 65 (side scraper)

All pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.